


# Norton V Series

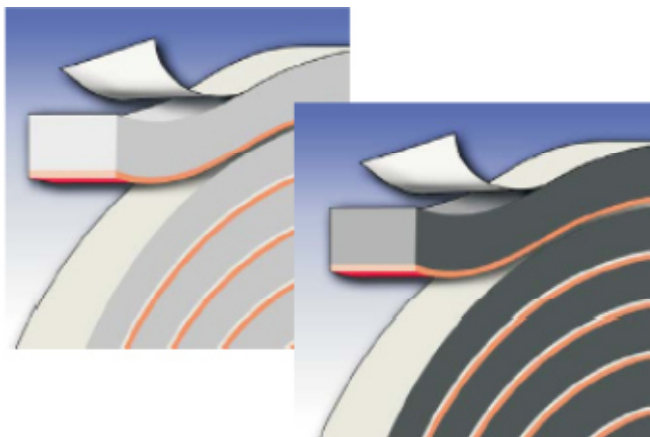

- PVC Sealants
- Compressible foam tapes with pressure sensitive adhesive
- Prevents the intrusion of liquids, air, sound and gases
- Paper liner prevents stretching during application
- Excellent weathering characteristics
- Soft foams for excellent conformability
- Medium foams for exterior air and water seals
- Firm foams for higher compression and abrasion resistance
- Fire retardant formulations available

<b>Properties</b>	<b>V560</b>	<b>V380</b>	<b>V540</b>	<b>V650</b>	<b>V530</b>	<b>V570</b>
<i>Thickness (mm)</i>	3.0 – 4.5	3.0 – 4.5	1.5 – 3.0	3.0 – 4.5	3.0 – 4.5	1.5 – 3.0
	6.0 – 10.0	6.0 – 10.0	4.5 – 6.0	6.0	6.0	4.5 – 6.0
	15.0	15.0 – 20.0	10.0			
<i>Colour</i>	Black	Grey	Black	Grey	Grey	Black
<i>Density (kg/m<sup>3</sup>)</i>						
<i>ASTM D 1667</i>	100	100	160	200	260	300
<i>Compression (N/cm<sup>2</sup>)</i>						
<i>ASTM D 1667</i>	0.80	1.20	3.00	2.50	3.80	9.00
<i>Compression set (%)</i>						
<i>ASTM D 3574</i>	4	4	7	7	7	13
<i>Elongation (%)</i>						
<i>DIN 5371</i>	215	215	230	150	180	215
<i>Hardness (Shore 00)</i>						
<i>ASTMD 2240</i>	18	12	30	25	40	60
<i>Water absorption</i>						
<i>(% volume)</i>						
<i>PST C-2</i>	1.5	1.5	1.5	2	3	1
<i>Peel 90°</i>						
<i>(N/cm) min.</i>						
<i>PST C-2</i>	3	3	3	2	2	2
<i>Application temperature</i>	+ 5 to + 50 °C					
<i>Service temperature</i>	- 30 to + 70 °C					

**Storage:** Material should be stored at 21 °C, 50 % relative humidity.

This information only relate to the rubber foam material and not to the adhesive or the adhesive property. All mentioned data are guideline values, a commitment cannot be deducted.